

# DATA SHEET



PM-2290A-R

Combination LED rear position stop & direction indicator



Appears clear when unlit



## Specifications

40 LEDs

16 diode double-row indicator function

24 diode triple-row rear position & stop functions

ECE certified to ECE Regs 6 and 7 for both horizontal and vertical mounting

EMC certified to ECE R10

Operating temperature range: -30°C to +50°C

IP67 rated

### Electronics:

Dual voltage 12/24V

Operating range: 9-32Vdc


Reverse polarity protected

Hard wired terminals potted in polyurethane

2 metre long cable :	Yellow	Indicator
	Red	Stop
	Brown	Rear position
	White	Ground

### Current draw:

Indicator	13.5v	0.12A	28v	0.07A
Stop	13.5v	0.14A	28v	0.08A
Rear position	13.5v	0.02A	28v	0.02A

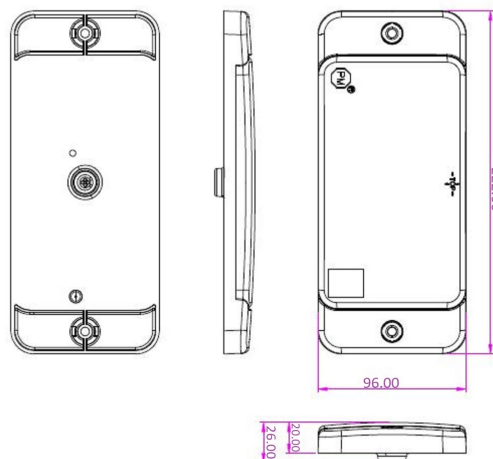

## Materials

Lens: PMMA-HI

Housing: ABS