

DATA SHEET

PM-359 series LED Cove Light




Images



Optional PM-5600 series timer switch available separately.



Dimensions

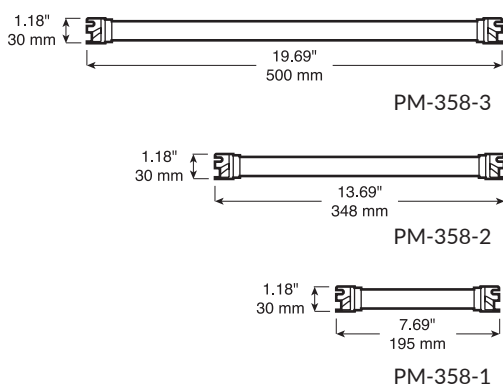

Part numbers

PM-359-1	195mm, stripped leads
PM-359-2	348mm, stripped leads
PM-359-3	500mm, stripped leads
PM-359-4	500mm, stripped leads at each end
PM-5600	Optional timer switch - surface mount
PM-5600-1	Optional timer switch - recessed mount



Specifications

Functions:	LED cove light
LEDs:	PM-359-1: 4 x Great White® LEDs PM-359-2: 6 x Great White® LEDs PM-359-3: 12 x Great White® LEDs PM-359-4: 12 x Great White® LEDs, wires at each end
Output:	PM-359-1: 300 lumens PM-359-2: 500 lumens PM-359-3: 1000 lumens PM-359-4: 1000 lumens
Dimensions:	PM-359-1: 195 x 27mm PM-359-2: 348 x 27mm PM-359-3: 500 x 27mm PM-359-4: 500 x 27mm
Voltage:	Multi-voltage: 12/24Vdc
IP rating:	IP68
Operating temperature:	-30°C to +50°C
Mounting:	Surface mounts with screws anywhere with a 90° angle between surfaces May be mounted horizontally or vertically
Wiring:	Hard-wired with stripped leads 500mm version available with wires at both ends for daisy-chaining lights together.
Timer switch:	Optional timer switch available (PM-5600 series)
Vibration resistant:	Yes
Power rating:	PM-359-1: PM-359-2: 3.6W @ 12V / PM-359-3: 4.44W @ 12V / 7.0W @ 24V PM-359-4: 4.44W @ 12V / 7.0W @ 24V
Current draw:	PM-359-1: PM-359-2: 0.30A @ 12 V / PM-359-3: 0.37A @ 12 V / 29V @ 24V PM-359-4: 0.37A @ 12 V / 29V @ 24V
Reverse polarity protection:	Yes
Warranty:	3 years



Materials

Lens:	Polyethylene Terephthalate Glycol (PETG)
End caps:	Polycarbonate