

# DATA SHEET

PM-2291F-C

Combination LED fog & reverse light




## Images



Lens appears clear when unlit

## Dimensions

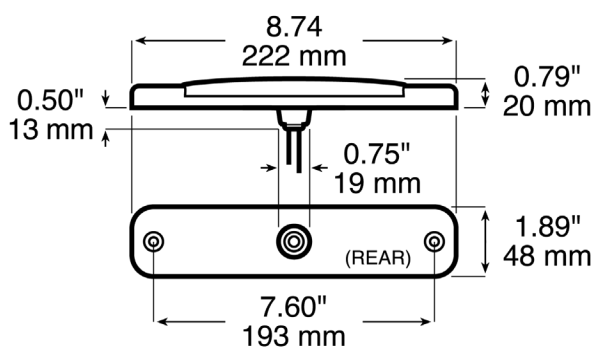

## Specifications

<b>Functions:</b>	Combined LED fog & reverse light
<b>LEDs:</b>	16 diodes: 8 diodes (fog) 8 diodes (reverse)
<b>Lens colour:</b>	Clear
<b>Certifications:</b>	ECE Reg 23 & 38 for both vertical & horizontal mounting: ECE Reg 23 E9 23R 0022 22230 (reverse) ECE Reg 38 E9 38R 0019 22230 (fog) ECE Reg 10-05 E9 10R 0600 22297
<b>Voltage:</b>	12/24V
<b>IP rating:</b>	IP67
<b>Operating temperature:</b>	-30°C to +50°C
<b>Mounting:</b>	Surface mount
<b>Wiring:</b>	2 metre cable Blue = rear fog Yellow = reverse White = ground
<b>Power rating:</b>	4.2W fog 3.6W reverse
<b>Current draw:</b>	Fog 0.30A @ 13.5V / 0.14A @ 28.5V Rev 0.29A @ 13.5V / 0.14A @ 28.5V
<b>Reverse polarity protection:</b>	Yes
<b>Warranty:</b>	3 years

## Materials

<b>Lens:</b>	Polycarbonate
<b>Housing:</b>	Polycarbonate

## Part number

PM-2291F-C Combination LED fog & reverse light

+44 (0) 1296 340045

sales@petersonseurope.co.uk  
sales@petersonseurope.eu

petersonseurope.com  
petersonseurope.eu

